



INON SYSTEM CHART for X-2 HOUSING

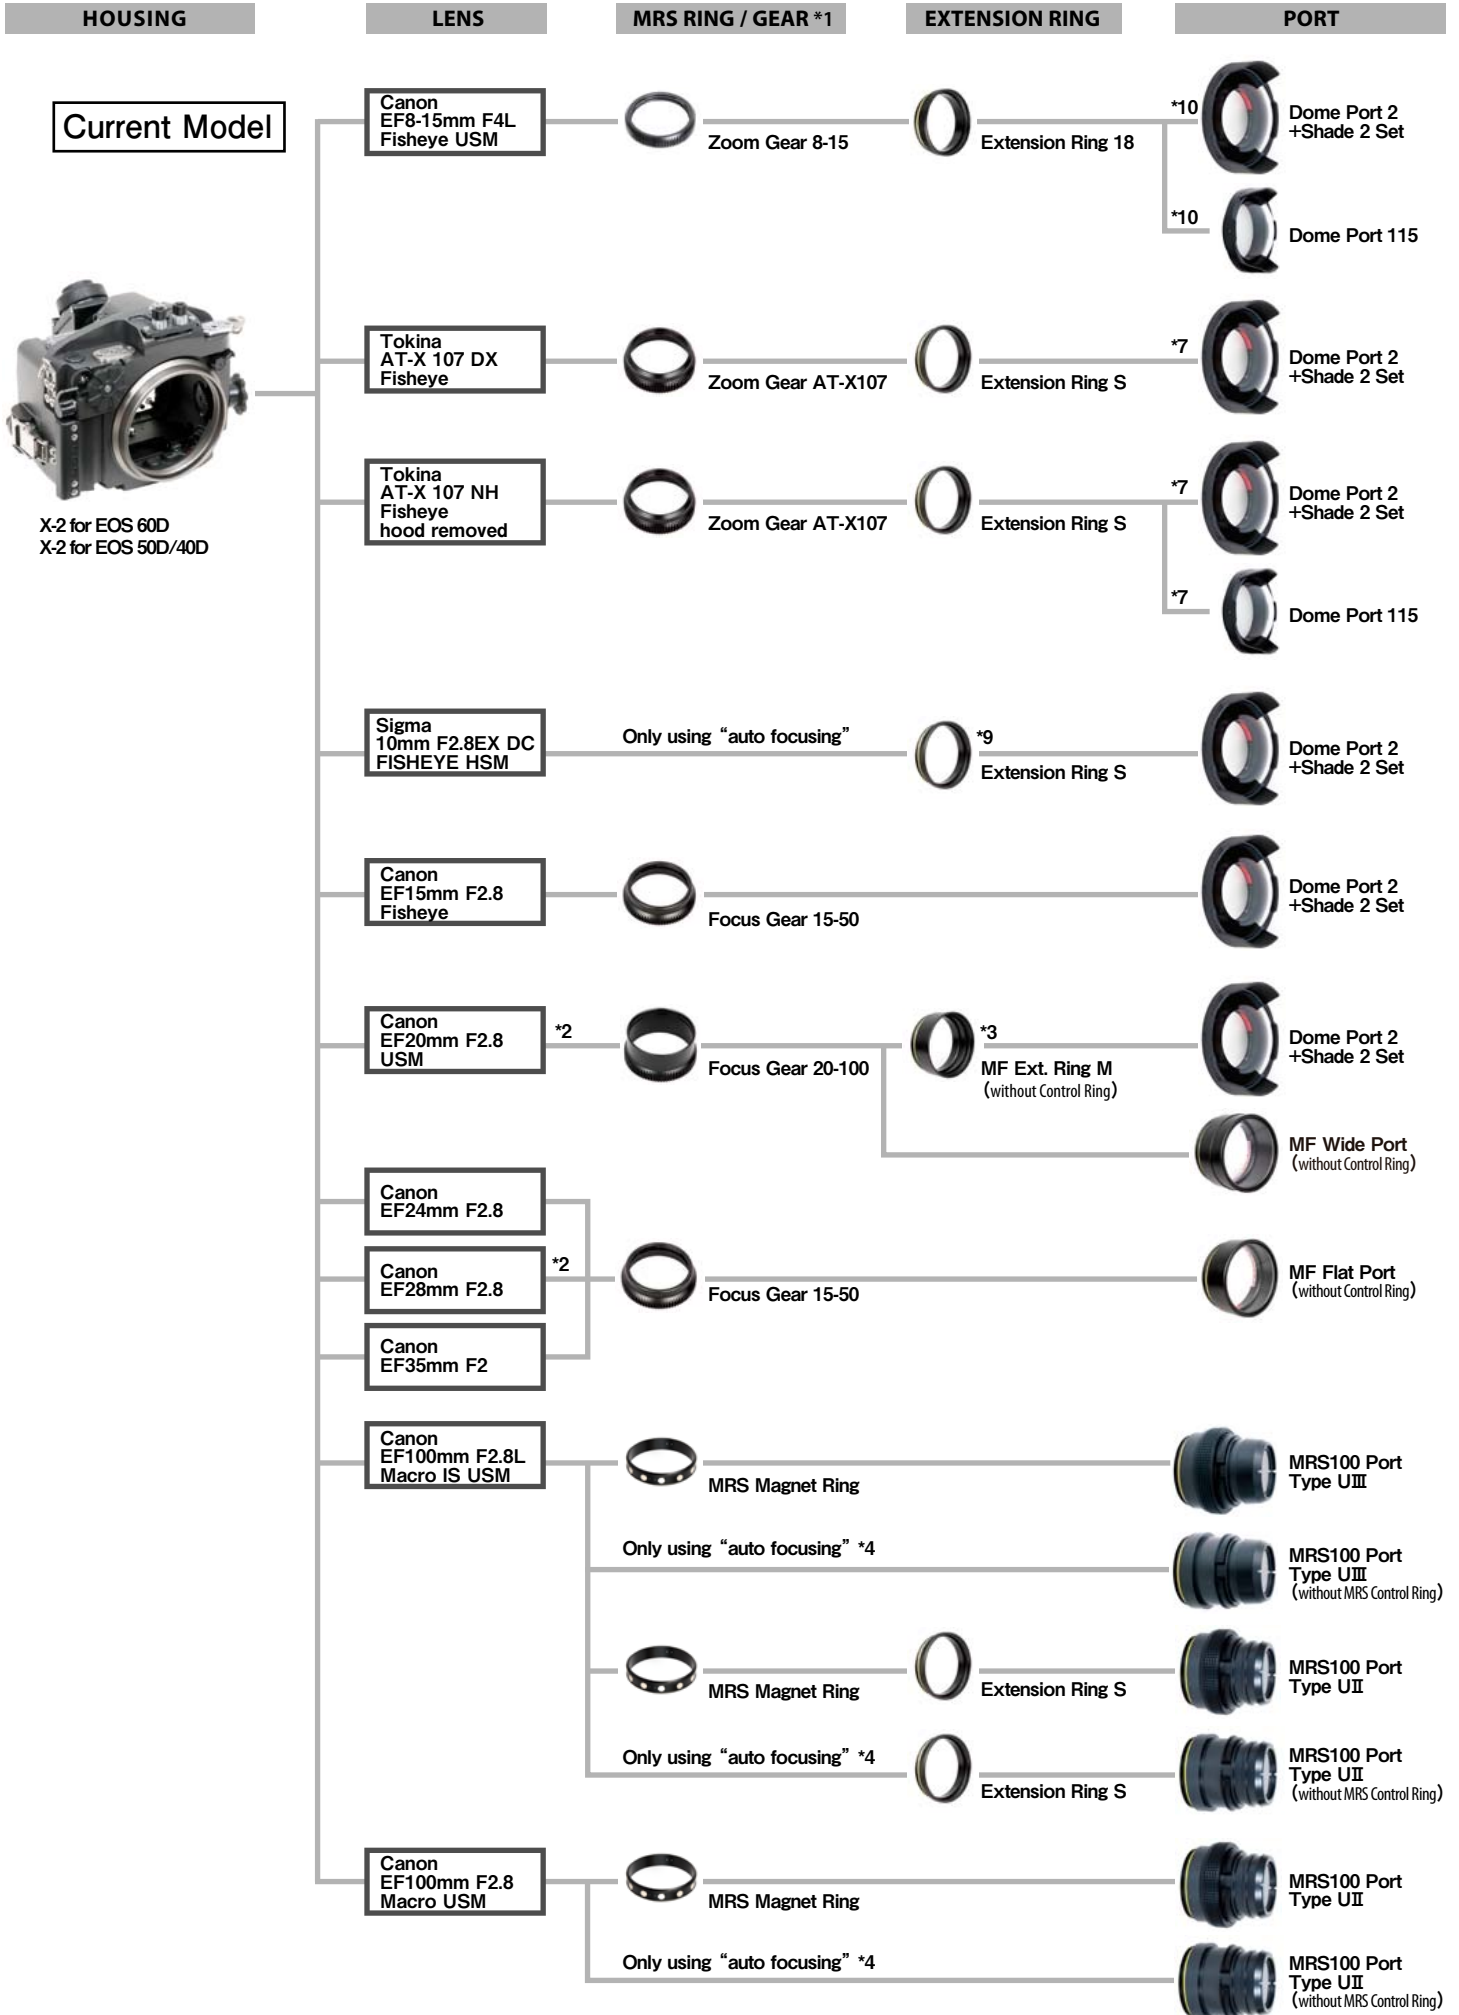

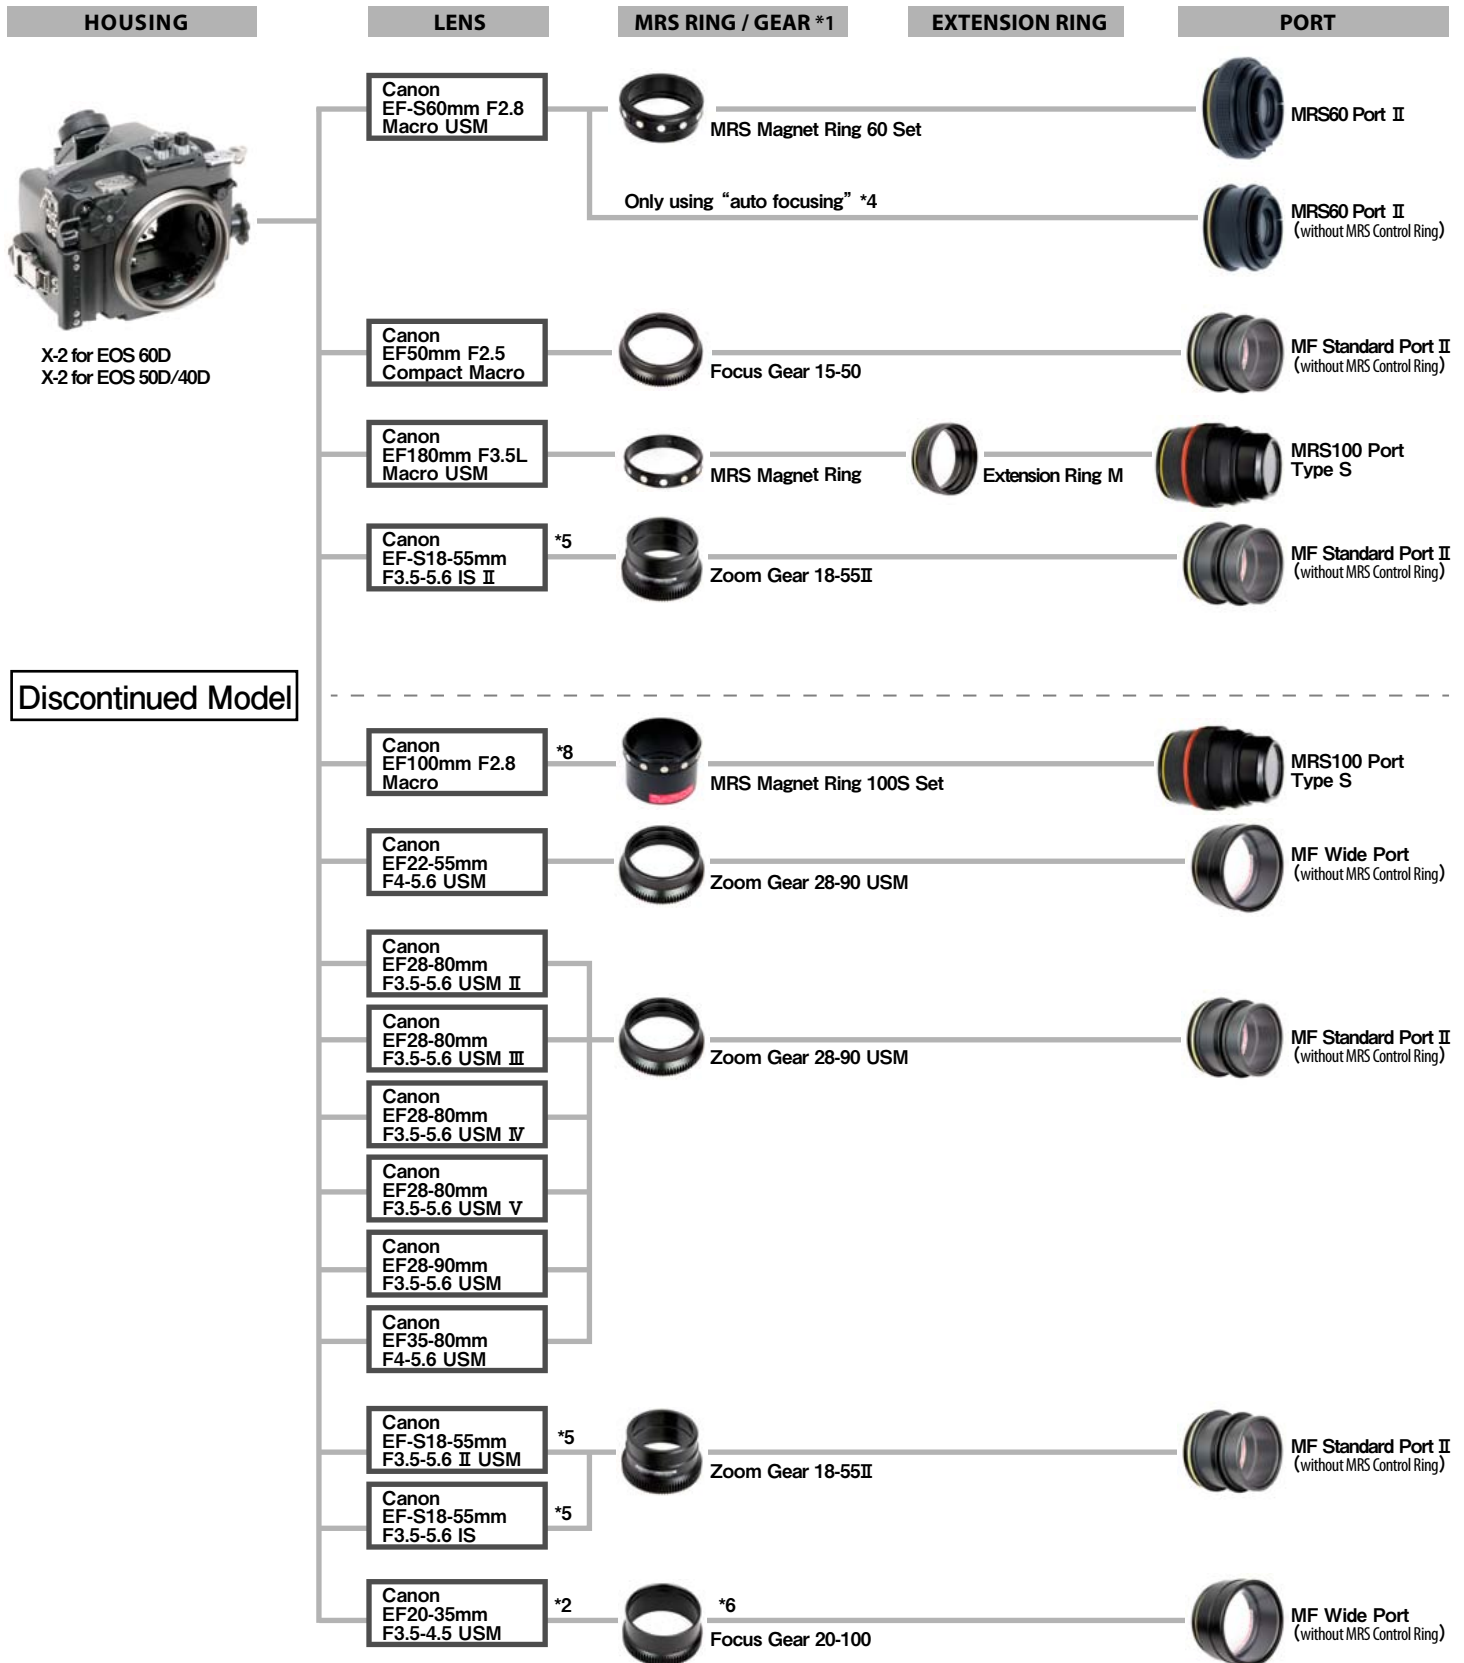

*1 Necessary for a single focus lens when using manual focusing or for a zoom lens when zooming.

*2 When shooting with wider aperture setting, image quality may degrade on peripheral part. Use smaller aperture setting.

*3 Minimum focus distance gets little bit longer. Commercially available close-up lens No.2 like "Canon Close-up Lens No.2 like "Canon Close-up Lens 500D/72mm" etc. would be recommended to attach on lens front to compensate it.

*4 Auto focus (AF) only. For manual focus operation, optional "MRS Control Ring 60/60II/100UII/Olympus 50" and compatible "Magnet Ring" is necessary.

*5 When shooting with zoom wide end with wider aperture setting, peripheral part of an image may get degraded. Use smaller aperture setting.

*6 Supports zoom operation. Manual focus (MF) is not supported and only auto focus shooting is available.

*7 "Shade Sponge D70" is attached on inner side of the Dome Port II or Dome Port 115 to block built-in flash light to prevent the flash light from exposing on an image. The optional [Zoom Gear AT-X107] to control zooming, comes with a Shade Sponge D70.

*8 Non USM old style lens.

*9 "Shade Sponge 7mm" is attached on inner side of the Extension Ring S to block built-in flash light to prevent the flash light from exposing on an image.

*10 "Shade Sponge D80" is attached on inner side of the Dome Port II or Dome Port 115 to block built-in flash light to prevent the flash light from exposing on an image. The optional [Zoom Gear 8-15] to control zooming, comes with a Shade Sponge D80.

"MF Port" series ("MF Standard Port II"/"MF Wide Port"/"MF Flat Port") or "MF Ext. Ring M" can not be attached on "Ext. Ring" other than "MF Ext. Ring M".