

INON

INON Zoom Gear 8-15

Thank you for purchasing INON product.

- Package contents** :
- Zoom Gear 8-15 ×1
 - Spare O-ring snip ×4
 - Shade Sponge D80 Set ×1
 - (Shade Sponge D80 ×1)
 - (User manual ×1)
 - This user manual ×1

- Compatible lens (as of Sep. 2018)** :
- Canon EF8-15mm F4L Fisheye USM (*1)
 - Canon EF16-35mm F2.8L II USM (*2)

(*1) Preinstalled lens hood on the lens has to be removed.

(*2) Supplied「Shade Sponge D80」 is not required.


- Compatible port/ Ext. Ring (as of Sep. 2018)** :
- Canon EF8-15mm F4L Fisheye USM
 - INON Ext. Ring 18 + INON Dome Port 2 + Shade 2 Set
 - INON Ext. Ring 18 + INON Dome Port 2
 - INON Ext. Ring 18 + INON Dome Port 115
 - Canon EF16-35mm F2.8L II USM
 - INON Ext. Ring M + INON Ext. Ring 36 + INON Dome Port 2 + Shade 2 Set
 - INON Ext. Ring M + INON Ext. Ring 36 + INON Dome Port 2
 - INON Ext. Ring M + INON Ext. Ring 36 + INON Dome Port 115

- Compatible housing (as of Sep. 2018)** :
- INON X-2 for EOS10D, X-2 for EOS10D BK
 - INON X-2 for EOS20D, X-2 for EOS20D BK, X-2 for EOS20D BK(TM)
 - INON X-2 for EOS30D BK(TM)
 - INON X-2 for EOS50D/40D
 - INON X-2 for EOS60D
 - INON X-2 for EOS70D
 - INON X-2 for EOS6D
 - INON X-2 for EOS80D

- Preparation** :
- Canon EF8-15mm F4L Fisheye USM
 - **Attach supplied 「Shade Sponge D80」 on Dome Port.**
 - Install supplied 「Shade Sponge D80」 on Dome Port. Make sure to use the Shade Sponge to eliminate influence of camera's built-in strobe on an image. Refer to respective user manual for detail of 「Shade SpongeD80」 .
 - Canon EF16-35mm F2.8L II USM
 - Supplied 「Shade Sponge D80」 is not required in this combination.


- Installation method** :
- Make sure that 4 x O-ring snips are put in inner grooves of this product; two of them are in the *front* groove at 180 degree spacing and other two are in the *rear* groove with 180 degree spacing so that each of 4 x O-ring snips are set with 90 degree spacing each other.

- The Zoom Gear 8-15 is fixed on the lens barrel by pressure molding of pre-installed O-ring snips on inner side of the Zoom Gear. You may have difficulty to install the Zoom Gear due to individual variety of space between the gear and the lens. In this case, take out and cut off O-ring snip(s) little by little to adjust pressure of O-ring snip(s). DO NOT cut off O-ring snips(s) too much or you cannot fix the Zoom Gear tight enough.

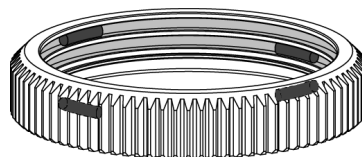


Canon EF8-15mm F4L Fisheye USM

- Set focus mode switch of the lens to 「AF」 position and adjust the zoom ring between 10mm and 15mm position then set the zoom limiter switch to 「LIMIT」 position.
- Put the Zoom Gear 8-15 on the lens barrel from back side and lightly press to the direction indicated by an arrow in the below image until it touches the rubber band.
- Make sure to press the Zoom Gear straightly against the lens barrel with holding the rubber band not to be displaced.
- Check that there is 7mm gap between the bottom surface of the Zoom Gear and the lens mount surface, and both surfaces must be parallel.

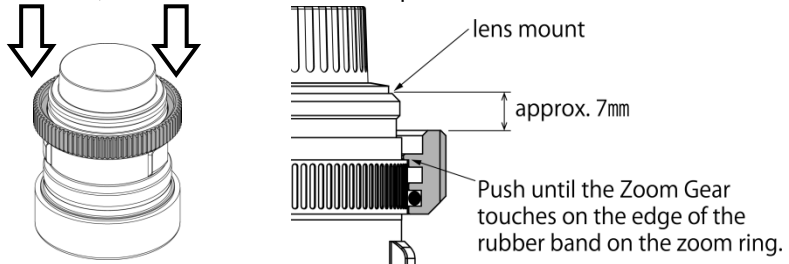

Canon EF16-35mm F2.8L II USM

- Set focus mode switch of the lens to 「AF」 position.
- Put the Zoom Gear 8-15 on the lens barrel from back side and lightly press to the direction indicated by an arrow in the below image until it touches the zoom ring.
- Make sure to press the Zoom Gear straightly against the lens barrel with holding the rubber band not to be displaced.
- Check that there is 7mm gap between the bottom surface of the Zoom Gear and the lens mount surface, and both surfaces must be parallel.

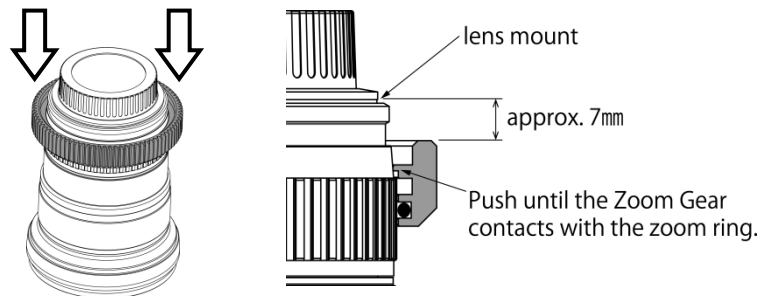

- Handling precautions:**
- Please note that lens manufacture has no concern with installation of this product on lens. Do not inquire lens manufacture about the installation. Also please note that you have to take full responsibility for the installation.
 - INON Inc. cannot take any responsibility for any trouble/damage(damage to lens/lens accessories/camera) resulting from the installation.
 - Should you have trouble like flooding caused by the installation, INON Inc. can not take any responsibility for incidental damage (relevant expense to take a shot etc.)
 - **Please perform the installation only if you can accept above conditions.**

INON Inc. 2-18-9, Dai, Kamakura, Kanagawa 247-0061
E-mail support@inon.co.jp / Fax. +81(0)467-48-2178
URL <http://www.inon.jp/>

September 2018