

INON

INON XD Mount for PT-056/058/059

Thank you for purchasing INON product.

The INON XD Mount for PT-056/058/059 is exclusively designed for Olympus underwater housings PT-056, PT-058 and PT-059 (for Tough TG series) to attach INON XD mount series lens. This product won't interfere optical cable adapter of the housing with an attachment lens being installed.

*** The optical cable adapter "PFCA-02" provided with the "PT-056" is not usable because it interferes with the "XD Mount". Please remove it or use optional "PFCA-03".**

- Package contents :**
- XD Mount for PT-056/058/059 ①
 - Retainer M52 ②
 - XD Mount Tool M52/M67 ③
 - Front Cap ④

Compatible product : **Compatible housing**

(As of October 2021)

- Olympus PT-056, PT-058 and PT-059 for Tough TG series

Compatible lens


- INON UWL-95S XD wide conversion lens
- INON UCL-165 XD underwater close-up lens
- INON UCL-67 XD, UCL-90 XD underwater close-up lens
- INON UFL-M150 ZM80 underwater micro fish-eye lens (*1)
- INON UCL-165 M67/UCL-330 close-up lens (*2)

(* 1) Optional *M27-XD Mount Converter for UFL-M150 ZM80* is required.

(* 2) Optional *M67-XD Mount Converter* is required.

Preparation :

- Component items are assembled as shown in the right image. Press the lock lever and twist the front cap counterclockwise to separate. You will find the Retainer M67 inside.

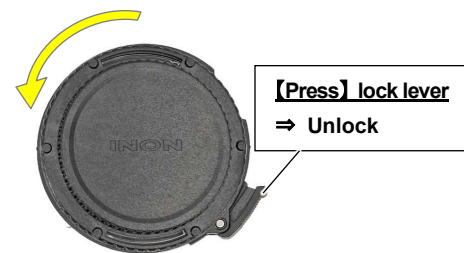

Installation :

- Place the XD Mount on the housing so that housing diffuser panel comes between two protrusions on the back of the XD Mount (A).
- Place the **Retainer M52** inside of the XD Mount without moving the XD Mount. Turn the **Retainer M52** clockwise to screw in the housing lens ring (B).
- Put the inner edge of the **XD Mount Tool M52/M67** into notches of the **Retainer M52** then slowly tighten (C).


(A)



(B)



(C)



⚠ Make sure to place the **Retainer M52** flat to prevent cross-threading. After completely tightening, confirm that the **Retainer M52** has been fastened securely without rattle.

⚠ Make sure not to drop the tool to prevent damage of the lens port surface.

- Installing lens** :
- Refer to respective user manual.
 - Put the front cap on when not using an attachment lens to protect lens port surface.



- Maintenance** :
- After use, rinse with fresh water to remove salt and other stains, and place in a well-ventilated area out of direct sunlight to dry thoroughly. DO NOT expose directly to fire or heat as this may cause deformation or damage.
 - DO NOT use organic solvents such as alcohol, benzene, thinner, or oils/chemicals such as rust inhibitors, lubricants, glazing agents, or detergents (especially alkaline detergents) when cleaning the product. Some of the components of this product may change when exposed to the above substances, such as melting or becoming brittle.
 - If the product is not used for more than a week, please remove and store it. Storing the product being attached on the combined product for extended period may cause deformation/damage due to continuous force applied to the combined product.

- Before installing:**
- DO NOT inquire of camera/housing manufacture installation of this product as it is not under the control of the manufacture. The user must take full responsibility for the installation/use of this product.
 - INON Inc. shall not be liable for any failure of the housing, housing accessory or camera due to installation/use of this product.
 - INON Inc. shall not be liable in any way for any incidental damages (such as expenses incurred in taking pictures/footages or loss of profit that should have been gained by the pictures/footages) that may result from flooding or other problems caused by the installation/use of this product
 - **Installation and use of this product shall be deemed as full consent of the user to the above conditions.**

INON Inc.

2-18-9, Dai, Kamakura
Kanagawa 247-0061

E-mail support@inon.co.jp

Fax. +81(0)467-48-2178

URL <http://www.inon.jp/>

September 2023