

INON


INON Optical D Cable SS Type L

Thank you for purchasing INON product.

INON Optical D Cable SS Type L transmits compatible camera's built-in flash light via multi-core fiber optics to trigger an external strobe.

- Package contents :**
- Optical D Cable SS Type L ×1
 - This user manual ×1

- Compatible strobe : (as of May 2018)**
- Following INON "strobe" attached on a camera system via INON 「Shoe Base M6」 or 「Shoe Base」 + 「Z Joint」

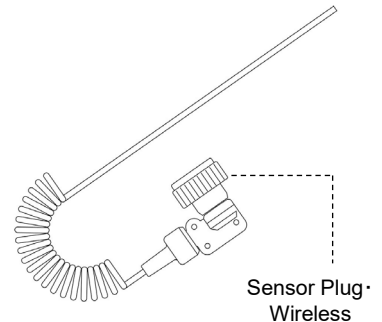

- **Wireless compatible strobes (Optical D Cable SS Type L is attached as it is)**

INON Z-330,S-2000, Z-240 【Type 4】 , D-2000 【Type 4】

- **Wireless non-compatible strobes (Sensor Plug has to be replaced with optional "Sensor Plug - Non-Wireless" (※))**

INON Z-240 【Type 3/ Type 2/ Type 1】 , D-2000 【Type 3/ Type 2/ Type 1】 , D-2000W, D-2000Wn, D-2000S, D-180, D-180S, Z-220F, Z-220S, Z-220



(※) Refer to an instruction manual 「L-Connector Modification Instruction」 which comes with the optional 「Sensor Plug - Non-Wireless」 for detail of replacement

**「Sensor Plug - Non-Wireless」
【Optional】**

- Compatible camera : system (*1) (as of May 2018)**

- Camera system compatible with INON 「Optical D Cable SS/Cap W32 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W35 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W41 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W42 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W48 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W51 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W52 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W55 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W56 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W59 Set Type L」
- Camera system compatible with INON 「Optical D Cable SS/Cap W60 Set Type L」

(*1) This product is a component of "Optical D Cable SS · Cap Set Type L" and not useable to connect compatible camera system and compatible strobe by its own.

How to use

- Put the bare end of the Optical D Cable SS Type L in「Holder Unit」(Optical D Cable SS/Cap W32 Set/W35 Set) / 「Shade Panel Unit」(Optical D Cable SS/Cap W41/W42/W48 Set Type L). Refer to respective product user manual for detail of installation method.
- Screw the "black plastic cap[strobe connector]" of the Optical D Cable SS Type L on strobe "slave sensor". Refer to respective strobe user manual for detail of installation method.
DO NOT tighten too much to avoid damage of the strobe connector or sensor of strobe.


Maintenance

- After using, remove the Optical D Cable SS Type L from camera system/strobe and soak in fresh water (below 30 °C / 86°F) for several hours after use to dissolve any salt build up. Blow off water drop by air gun/blower and dry in shaded and well ventilated area. It may take several days to completely dry.
- Especially take care to clean the both edge of the Optical D Cable SS Type L to dissolve any salt build up. Scratch or cloud with salt build up on the edge may lead poor signal transmission.
- In the event of poor signal transmission resulting from scratch/cloud or necessity to shorten the cable, it is possible to cut the cable to refresh the damaged edge or to get desired length. Refer to our web site below to cut strobe connector side.

"L Connector Modification Instruction"

<http://www.inon.jp/pdf-dl/userdata/ModifyCableConnector-en.pdf>

When you cut the Optical D Cable Type L, use sharp blade like a razor or a utility knife and make sure to cut the edge flatly. If you observe roughness on the cable section, cut it again to prevent poor signal transmission




- Handling precaution:**
- Optical D Cable SS Type L has ultra durability (minimum bend radius 2mm) but inner portion could be damaged when bending less than radius of 2mm or excessive shock. And if the cable being bended for long time, it will not back to original shape. Replace with optional「Replacement Optical D Cable SS Type L」 in case of poor signal transmission.
 - When carrying your camera system, DO NOT hold the Optical D Cable SS Type L with being connected to a housing or a strobe to prevent the fiber optics coming off from the L- Connector or accidental damage on strobe/L-Connector/Optical Cable etc.

Optional Parts : • Replacement Optical D Cable SS Type L/Optical Cable M
Optical D Cable Type L without connector.

- L-Connector Kit (strobe) · Wireless

Replacement strobe connector unit without a cable. Same strobe connector as originally installed on this product.



- Sensor Plug · Wireless

Replacement sensor plug unit originally installed on this product.



- Sensor Plug · Non-Wireless

Replacement Sensor Plug unit to be replaced with originally installed Sensor Plug to use for Non-Wireless strobes described on the first page of this manual..



INON Inc.

2-18-9, Dai, Kamakura,
Kanagawa 247-0061 JAPAN

E-mail support@inon.co.jp

Fax. +81(0)467-48-2178

URL <http://www.inon.jp/>

May 2018