

INON

INON XD Mount Conversion Set for UCL-90/UCL-67

Thank you for purchasing INON product.

The INON ***XD Mount Conversion Set for UCL-90/UCL-67*** is an optional accessory to convert M67/LD mount of UCL-90 M67/UCL-90 LD/UCL-67 M67/UCL-67 LD to XD Mount.

※A precision screw driver Philipps #0 (axle diameter 3 mm or less) is required.

- Package contents:**
- XD Bayonet Mount ×1 ①
 - XD Mount Spacer ×1 ②
 - M2×4 screws ×6 ③
 - Lens Cap (camera side) ×1 ④

- Compatible products :**
- INON UCL-90 M67/UCL-90 LD close-up lens
 - INON UCL-67 M67/UCL-67 LD close-up lens

Installation : 1) Remove original lens mount

■ UCL-90 M67/UCL-67 M67

Remove six M2x4 fixing screws from the lens barrel by #0 Phillips precision screwdriver (**※shaft diameter 3mm or less**). Removed fixing screws are necessary to install this product. Keep removed lens mount for your future use.



■ UCL-90 LD/UCL-67 LD

Remove six M2x4 fixing screws from the lens barrel by #0 Phillips precision screwdriver. Then, remove a "spacer" under the "LD Bayonet Mount" by removing six fixing screws. Keep removed screws/LD Bayonet Mount/spacer as they are necessary when you need to install the "LD Bayonet Mount" again. When you re-install the LD Bayonet Mount, put the LD bayonet Mount so that the guide on the "LD Bayonet Mount" locates as shown in below image.



If you have any difficulty to unscrew M2x4 fixing screw(s), do not proceed any further.

as you could damage fixing screw(s) and the original "M67 Screw Ring"/"LD Bayonet Mount" can not be separated from UCL-90/67 M67, UCL-90/67 LD. Please consult with your purchasing dealer for advice.

(continued)

2) Put grease in the screw holes of the lens barrel


Apply grease (supplied with an underwater case) in six screw holes to avoid anchoring of fixing screws.



3) Attach “XD Mount Spacer” on the lens barrel

Put the “XD Mount Spacer” on the lens barrel as shown in the image so that screw holes both on the “XD Mount Spacer” and lens barrel are matched then fasten them with packaged M2x4 fixing screws (do not use removed screws here) by using a precision screw driver #0.

When tightening M2x4 fixing screws, tighten them evenly by drawing star pattern not too tight not to damage the lens itself.

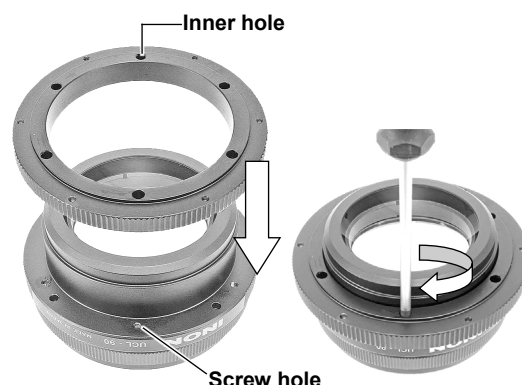


4) Attach “XD Bayonet Mount” on XD Mount Spacer

Align the outer six threaded holes on the XD Mount Spacer with the six holes on the “XD bayonet mount” so that the guide on the “XD Bayonet Mount” locates product name (UCL-90, etc.) on the lens body.

Then, fasten them using the precision screwdriver #0 and the removed M2x4 screws.

When tightening M2x4 fixing screws, tighten them evenly by drawing star pattern not too tight not to damage the XD Bayonet Mount.

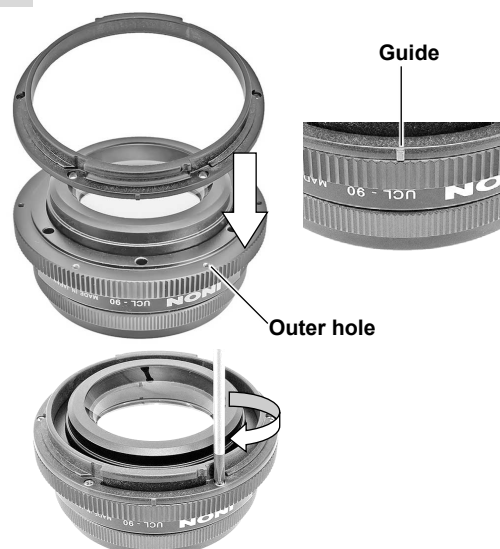

Handling precautions

- Please follow above installation method to attach this product and note that you have to take full responsibility for the installation. If you are not confident for proper installation, please consult your purchasing dealer.
INON Inc. cannot take any responsibility for any trouble/damage (damage to lens, combined accessory, housing, camera etc.) resulting from the installation.
- Should you have trouble like flooding caused by the installation, INON Inc. cannot take any responsibility for incidental damage (relevant expense to take a shot etc.)
- **Please perform the installation only if you can accept above conditions.**

INON Inc.

2-18-9, Dai, Kamakura
Kanagawa 247-0061
E-mail support@inon.co.jp
Fax. +81(0)467-48-2178
URL <http://www.inon.jp/>

October 2021