


Features


The M5 Plate Direct Base III is an optional product to attach the Direct Base III on other manufactures' system which has M5 screw.

How to attach

Installing M5 Plate Direct Base III

X Tighten firmly and completely by holding long side of the Allen Wrench with hand.

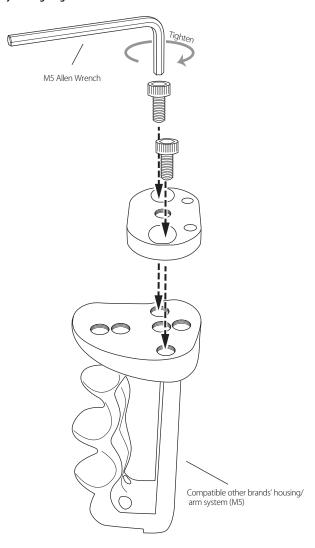



Specifications

Package contents M5 Plate Direct Base III x 1,M5 Cap Screw x 2,

Spare O-ring x 1 (for Direct Base III),

M5 Allen Wrench x 1, Washer (black) x 2 (incl. one spare)

Corrosion resistant aluminum alloy, stainless, Polyoxymethylene Material

38.8mm(W) x 8mm(H) x 25mm(D), 1.5'' (W) x 0.3'' (H) x 1.0'' (D) 19.4g (air) / approx.13g (u/w) Dimensions


Weight

0.7oz (air) / approx.0.5oz (u/w)

Compatible arm/base/camera system etc. Other brands' housing/arm system(M5) *1*2


- *1 Compatible with 2 x M5 screw holes with 6mm or more depth and 24mm ~ 28mm center-to-center
- distance of screw holes.

 *2 INON INC. has not confirmed compatibility with specific product(s) from other manufactures. Before using, make sure to check if the product(s) from other manufactures is compatible and does not interfere other combined product(s)

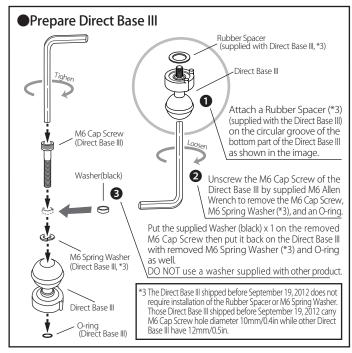

Install Direct Base III

After installing the Washer (black) on the Direct Base III, attach it on the M5 Plate Direct Base III so that the nail of the Direct Base III engage in the hole on the M5 Plate Direct Base III.



Make sure to re-tighten when you observe any of below;

- A gap between the Direct Base III and M5 Plate Direct Base III.
- Direct Base III is <u>not upright</u> against mounting plane.
- · Combined arm is loose.

This configuration requires the Direct Base III to accept ample load of combined arm system so the Direct Base III or M5 Plate Direct Base III could be damaged if the Direct Base III has not securely installed.

