

# INON

## INON Dome Port EP02 for Olympus

Thank you for purchasing INON product.

INON Dome Port series is a high quality port using an optical glass with multi-coating to obtain sharp and high contrast image even in edge of an image without flare/ghost.

The 「Dome Port EP02 for Olympus」 is exclusively for Olympus 『M. ZUIKO DIGITAL ED 8mm F1.8 Fisheye PRO』 lens.

- Packaged contents** :
- Dome Port EP02 for Olympus ① ×1
  - Protector ② ×1
  - Lock Screw ③ ×5
  - Allen Wrench ④ ×1
  - This user manual ×1




- Compatible underwater housing** (as of June 2016) :
- Olympus PT-EP11
  - Olympus PT-EP08

- Compatible lens** (as of June 2016) :
- M.ZUIKO DIGITAL ED 8mm F1.8 Fisheye PRO
- \*1 Optional Olympus 「POSR-EP10 UW Shading Ring」 is required  
 \*2 To use 『M.ZUIKO DIGITAL ED 8mm F1.8 Fisheye PRO』 in manual focus mode, optional Olympus「PPZR-EP05 Underwater Zoom Ring」 is required.

**Installation/usage** :

**Before installing this product, please carefully read through 「Handling precautions」 section of this manual and user manual/warranty policy of your camera/housing/accessory to understand/confirm warranty policy of INON Inc. and camera/housing/accessory manufacturer.**

- Make sure that there is no dust/damage on the O-ring, O-ring groove of the 「Dome Port EP02 for Olympus」 and O-ring contact surface of the housing.
- Install「Dome Port EP02 for Olympus」to the housing. Slide the Slide Lock of the housing and turn the Port Ring (A). Then, fit a male tabs of the 「Dome Port EP02 for Olympus」 into concave parts of the Port Ring and slowly insert the 「Dome Port EP02 for Olympus」 until it stops (B).
- Turn back the Port Ring to lock. Make sure that the Port Ring is securely locked with the Slide Lock being in lock position (C).
- Then attach the「Protector」if you use it. The protector is strongly recommended since it avoids flare/ghost and also provides stable placement of combined unit (housing/port) when not in use. Once the「Dome Port EP02 for Olympus」has been installed, place the Protector on the「Dome Port EP02 for Olympus」 and adjust the large flanges position at 6 and 12 o'clock(D). Next, push small flanges with your fingers to completely set the edge of the Protector in the groove of the 「Dome Port EP02 for Olympus」. Fix the Protector with 4 x Lock Screws by supplied Allen Wrench. Tighten screws alternately and evenly by making cross pattern. DO NOT tighten too much or unequally to prevent accidental damage/deformation of the Protector.
- Install a camera with 『M.ZUIKO DIGITAL ED 8mm F1.8 Fisheye PRO』/「POSR-EP10 UW Shading Ring」 in compatible housing. Refer to housing user manual for detail of installation method of a camera in the housing.

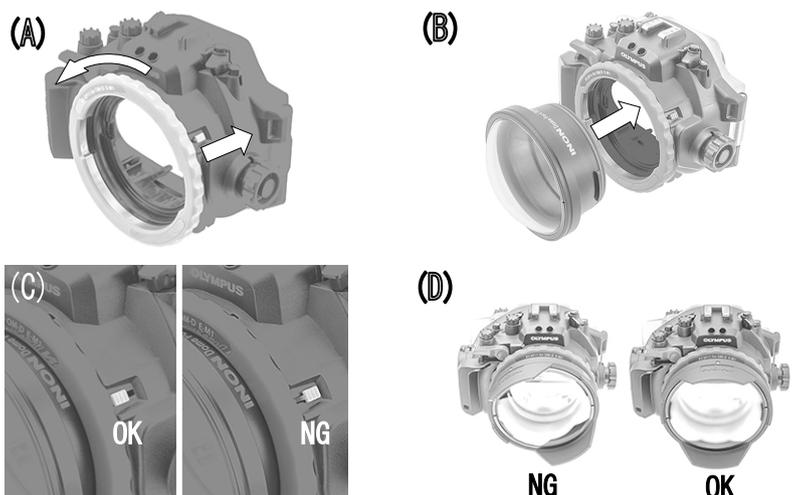

- Pre-use check** : • **Immerse assembled housing/dome port in a bath tub with fresh water (below 30°C/86°F) to check waterproof property. There must be no flooding inside of the assembled housing/dome port.**  
Refer to housing user manual for detail of pre-use check.
- Maintenance** : • After using underwater, first rinse and then soak the housing/port in fresh water (below 30°C/86°F) for several hours to dissolve any salt build-up. Refer to housing user manual for detail.  
• Blow off remaining water and leave the housing at shaded and well-ventilated area to dry with no water drops on the lens surface (it may take several days to completely dry). Remaining water on the lens surface may cause burn/spot.
- How to disassemble** : • First, remove the 「Protector」 (if you use it) then detach the 「Dome Port EP02 for Olympus」 in reverse procedure when attaching them.
- Handling Precautions** : • Protect from impact shock and vibration, such as vibrating boat deck to prevent malfunction or flooding of the product.  
• Do not expose to extra heat, such as inside of a sun-heated car, or in hot direct sunlight, such as a beach or boat deck. Doing so may cause damage and subsequent flooding.  
• Damage of the lens surface may affect on depth rating. So be sure to handle this product not to damage and to use within rated depth.

• Pre-use check, use condition, after-use maintenance and maintenance of waterproof property conform to housing user manual. **Make sure to use genuine Olympus Silicon Grease (supplied with Olympus housing) for pre-installed O-ring maintenance.**

• Please note that lens/housing/accessory manufacture has no concern with the installation of this product on the housing. DO NOT inquire lens/housing/zoom gear manufacture about the installation. You have to take full responsibility for the installation.  
• Please be aware of **the warranty of lens/housing/accessory may be void after the installation** even within the warranty period. Refer to lens/housing/accessory user manual/warranty policy before the installation.  
• INON Inc. cannot take any responsibility for any trouble/damage (damage to camera, lens, housing, accessory) resulting from the installation.  
• Should you have trouble like flooding caused by the modification, INON Inc. cannot take any responsibility for incidental damage(relevant expense to take a shot etc.)  
• **Please perform the installation only if you can accept above conditions.**

- Option** : • **Dome Lens Unit Cover**  
Neoprene cover usable underwater protects lens element.  
Recommend to cover lens whenever not in use.
- **Protector**  
Set of ②,③ and ④ in the product image.
- **POL-E301 Silicone O-Ring**  
Replacement O-ring made by Olympus.



#### INON Dome Port EP02 for Olympus Specifications

Type	Dome Port EP02 for Olympus
Compatible Lens	Olympus M.ZUIKO DIGITAL ED 8mm F1.8 Fisheye PRO
Length	78mm / 3.1inch
Outer Diameter	φ 132mm / 5.2 inch
Weight	453g / 15.9 oz (air)
Depth Rating (*1)	75m / 246 feet
Material/Surface Finishing	Corrosion-resistant aluminium alloy/Rigid black alumite
Glass Materials/Surface Finishing	Optical glass/inner multi coating

\*DO NOT use the housing beyond its depth rating if it is smaller than 75m.

INON Inc.

2-18-9, Dai, Kamakura  
Kanagawa 247-0061  
E-mail support@inon.co.jp  
Fax. +81(0)467-48-2178  
URL http://www.inon.jp/

June 2016