

# INON

## INON Zoom Gear EFS18-55STM

Thank you for purchasing INON product.



**Package contents** : • Zoom Gear EFS18-55STM ×1  
• Spare O-ring snip ×4  
• This user manual ×1

**Compatible lens** : • Canon EF-S18-55mm F3.5-5.6 IS STM  
(as of Sep. 2018)

**Compatible port/  
Ext. Ring** : • INON MF Standard Port 2 (w/o control ring)  
(as of Sep. 2018)

**Compatible housing** : • INON X-2 for EOS20D, X-2 for EOS20D BK, X-2 for EOS20D BK(TM),  
(as of Sep. 2018) X-2 for EOS30D BK(TM), X-2 for EOS50D/40D, X-2 for EOS60D,  
X-2 for EOS70D, X-2 for EOS80D

- Installation method** :
- Set focus mode switch of the lens to 「AF」 position and set zoom position for minimum extension.
  - Make sure that 4 x O-ring snips are put in inner grooves of this product; two of them are in the front groove at 180 degree spacing and other two are in the rear groove with 180 degree spacing so that each of 4 x O-ring snips are set with 90 degree spacing each other.
  - Put the Zoom Gear EFS18-55STM on the lens barrel from back side not to have rubber strips on the inside of this product override the focus mode switch or image stabilizer switch on the lens barrel and lightly press until the front edge of this product aligns with the rear edge of the center groove on the rubber band of the lens barrel. Make sure to press the Zoom Gear straightly against the lens barrel with holding the rubber band not to be displaced.
  - Check that there is 7mm gap between the bottom surface of the Zoom Gear and the lens mount surface, and both surfaces must be parallel.

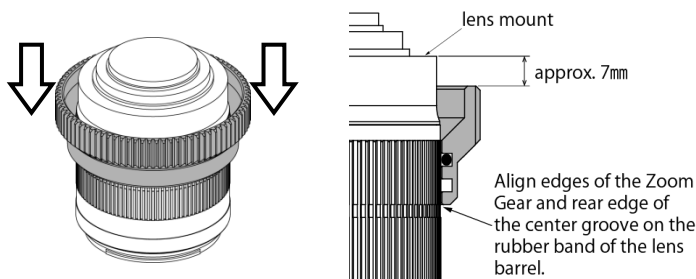

- The Zoom Gear EFS18-55STM is fixed on the lens barrel by pressure molding of pre-installed O-ring snips on inner side of the Zoom Gear. You may have difficulty to install the Zoom Gear due to individual variety of space between the gear and the lens. In this case, take out and cut off O-ring snip(s) little by little to adjust pressure of O-ring snip(s). DO NOT cut off O-ring snips(s) too much or you cannot fix the Zoom Gear tight enough.

- Handling precautions:**
- Please note that lens manufacture has no concern with installation of this product on lens. Do not inquire lens manufacture about the installation. Also please note that you have to take full responsibility for the installation.
  - INON Inc. cannot take any responsibility for any trouble/damage(damage to lens/lens accessories/camera) resulting from the installation.
  - Should you have trouble like flooding caused by the installation, INON Inc. can not take any responsibility for incidental damage (relevant expense to take a shot etc.)
  - **Please perform the installation only if you can accept above conditions.**

INON Inc. 2-18-9, Dai, Kamakura, Kanagawa 247-0061  
E-mail support@inon.co.jp / Fax. +81(0)467-48-2178  
URL <http://www.inon.jp/>

September 2018