



## INON Straight Viewfinder Unit II D10

Thank you for purchasing INON product.

The INON **Straight Viewfinder Unit II D10** is designed for INON X-2 R5 M


### Package contents :

- STVFI1 D10 ① x1
- Lens cap ② x1
- Spare O-ring ③ x1

### Compatible housing : (as of January 2025)

- INON X-2 R5 Mark II

### Installation method

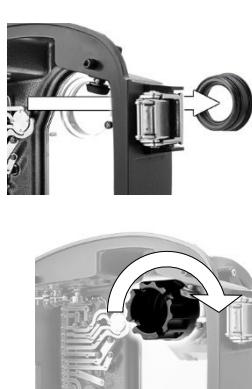

#### Lock Ring Tool for X-2

screw preinstalled lock ring from the back of the housing rear body and remove it



installed finder unit from


the viewfinder unit with the housing rear body panel and push the viewfinder. The fixing pins must be completely seated in the fixing pin holes and there must not be any gap between the viewfinder body and the housing rear panel surface.

Using the **Lock Ring Tool for X-2 Finder Unit**, fasten the viewfinder with the Lock Ring.

- After installation, conduct leak check by preinstalled Vacuum Leak Sensor.

### Options

- Lens Cap (for 45° Viewfinder Unit/Straight Viewfinder Unit for X-2)  
② in the product image.
- Replacement O-ring (for 45° Viewfinder Unit/Straight Viewfinder Unit for X-2)  
③ in the product image.
- Diopter Correction Lens [+1.5D] for 45VF-II/STVF-II  
Add-on correction lens to shift +1.5 diopter for those who are unable to adjust with camera's viewfinder diopter adjustment angle due to long sight or presbyopia. The **Diopter Correction Lens** has to be installed before diving by drop it inside of the viewfinder from housing side and tighten it by packaged tool (not removable underwater).
- Lock Ring Tool for X-2 Finder Unit  
Dedicated tool to attach/detach a viewfinder unit for INON X-2 series housing.

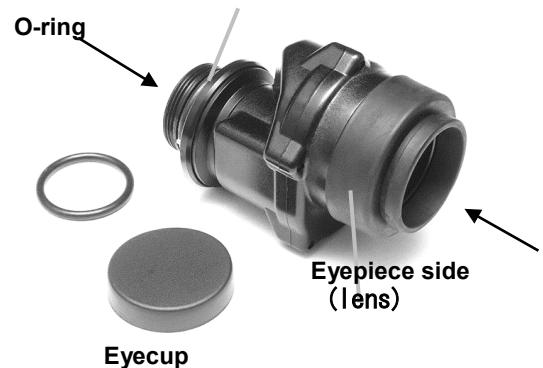

Lock Ring for Finder Unit

Fixing Pins



INON Inc. 2-18-9, Dai, Kamakura, Kanagawa 247-0061 JAPAN

E-mail [support@inon.co.jp](mailto:support@inon.co.jp) Fax. +81(0)467-48-2178

URL <http://www.inon.jp/>

January 2025