

INON

INON M52 Lens Holder Shoe Base

Thank you for purchasing INON product.

The INON M52 Lens Holder Shoe Base is a lens holder attached on the housing accessory/cold shoe supporting quick switch of lenses underwater.

Package contents: • M52 Lens Holder Shoe Base ×1

Compatible product:
(As of October 2021)


Shoe Adapter

- Accessory Shoe (*1) on camera housing etc.
- INON *Shoe Base Adapter D4*
- INON *Shoe Base Adapter X-2*
- INON *Shoe Base Spacer*

Lens Caddy

- INON M52 Mount series attachment lens
- INON *UFL-M150 ZM80 Underwater Micro Fisheye Lens*
+ *M27-M67 Mount Converter for UFL-M150 ZM80* + *Step-up Ring 52-67*


(*1) Not guaranteed compatibility with all housing accessory/cold shoe.

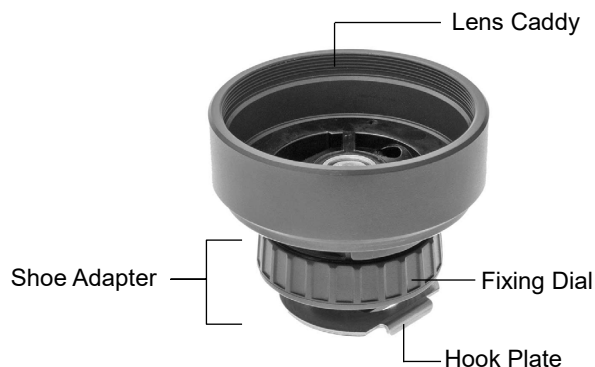

*The following images shows the use of the "XD Lens Holder Shoe Base", but the usage is the same.

Installation : Installing on a accessory/cold shoe

- (a) Loosen the Fixing Dial to push up the Hook Plate as in below left image.
- (b) Attach this product on the accessory/cold shoe all the way to the back end.
- (c) Hitch the nail of the Hook Plate on the back edge of the cold shoe then tighten the Fixing Dial. (*2)

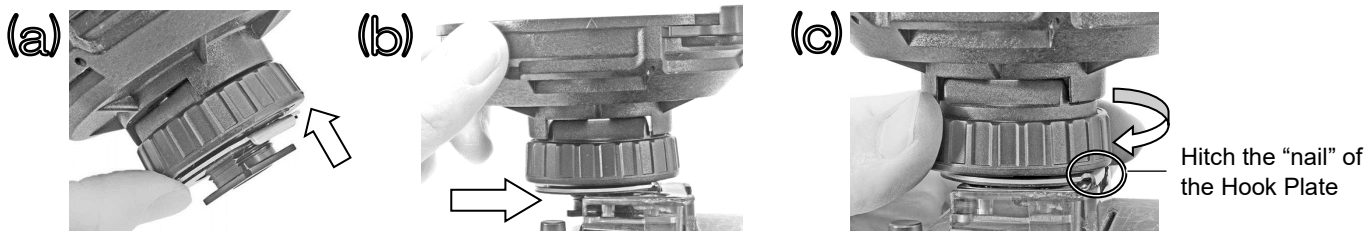

(*2) Depending on design of an accessory/cold shoe, the Hook Plate nail cannot reach to the back edge. If this is the case with your housing, install this product with locating the nail facing front.

Confirming proper installation


After installation, make sure to confirm that the Fixing Dial is properly tightened and the product is installed properly as in below left image.

Incomplete tightening of the Fixing Dial or improper installation could lead to accidental removal/damage/loss of this product and/or combined system



Proper installation

Shoe Adapter has not reached to the back end of the cold shoe

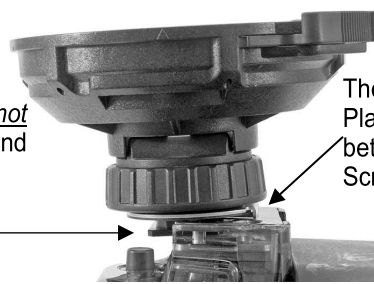

Improper installation

The nail of the Hook Plate is pinched between the Fixing Screw and cold shoe

(continued)

Attaching lens

Follow same procedure to attach the lens on a underwater housing equipped with M52/pitch 0.75 screw mount. Refer to M52 mount series lens user manual for detail. Apply little amount of grease (grease for housing) on threaded part of M52 Lens Holder to prevent salt build-up or electrical corrosion between M52 Lens Holder and M52 Mount series lens.

Maintenance:

- After each use, rinse with fresh water to dissolve any salt build-up and clean the product. Place in shaded and well ventilated area to completely dry. Never apply flame or direct heat or deformation/damage may result.
- DO NOT clean with organic solvent like alcohol, benzene or thinner and oil and fat containing /chemical material like rust inhibitor, lubricant, polish or chemical agents (especially alkaline cleaning agents). This product is made from polycarbonate etc., which will dissolve or get brittle if put in contact with such materials.

Storage method:

- Store the product in shaded, well ventilated and dry area. Avoid storing near chemicals or in the area with cold/high temperature, high humidity or large temperature and humidity fluctuations to prevent deformation, mold, rust or corrosion.
- Keep this product out of reach of children. They may swallow accessories or small parts of this product. See a doctor immediately if a child swallow accessories or small parts.

Handling precautions:

- Make sure to install the product properly according to this user manual. If the Fixing Dial has not been properly tightened or this product is not properly installed, this product/attached compatible product may be fell off/damaged/missing.
- When transporting combined system using this product, be sure to hold "compatible housing etc." instead holding combined product or this product itself and do not apply excessive shock, vibration or excessive load on the combined system to avoid combined product/housing/protector being fell off/damaged/missing.

**Options:**

- Shoe Base Adapter D4
Optional product to attach this product on compatible product including base stay products such as "Grip Base D5".
- Shoe Base Adapter X2
Optional product to attach this product on compatible product including X-2 series housing.



Please note that housing manufacture has no concern with the installation of this product on the housing. DO NOT inquire housing manufacture about the installation. Also please note that you have to take full responsibility for the installation.

The installation of this product may void warranty of housing even the warranty period has not been expired. Please check user manual/warranty certificate of housing for detail of warranty condition

INON INC. cannot take any responsibility for any trouble/damage(damage to housing/housing accessories/camera) resulting from the installation.

Should you have trouble like flooding caused by the installation, INON INC. cannot take any responsibility for incidental damage(relevant expense to take a shot etc.)

Please perform the modification only if you can accept above conditions.

INON Inc.
2-18-9, Dai, Kamakura,
Kanagawa 247-0061 JAPAN
E-mail support@inon.co.jp
Fax. +81(0)467-48-2178
URL <http://www.inon.jp/>