

Thank you for purchasing INON product.


The INON Shoe Base BALL is an optional part to add a ball-joint on the accessory shoe etc. of a camera housing to attach strobe/light/action camera combined with INON Arm II type ball-joint adapter via 『Clamp III』.

×1

Package contents: •

Shoe Base BALL Body

This user manual ×1



Compatible

[Shoe Adapter]

Product: (as of October, 2019)

- · Accessory Shoe (*1) of water-proof camera housings, "Mount Base" and "Video Base" etc.
- INON \[Shoe Base Spacer] \[Shoe Base Adapter D4] \[Shoe Base Adapter X-2] + compatible product

[Ball Adapter]

- Connectable to an adapter equipped with INON Arm II type ball-joint via 「Clamp III」
- (*1) Refer to the \(\subseteq \text{Shoe Base BALL Compatibility Chart} \) on INON official website.

Installation:

Installing on an accessory shoe


- (a) Loosen the Fixing Dial counterclockwise to push up the Hook Plate as in below left image.
- (b) Attach the Shoe Base BALL on the cold shoe all the way to the back end.
- (c) Hitch the nail of the Hook Plate on the back edge of the cold shoe then tighten the Fixing Dial (*2)



(*2) Depending on design of an accessory shoe, the Hook Plate nail cannot reach to the back edge. If this is the case with your housing, install this product with locating the nail facing front.

Confirming proper installation

After installation, make sure to confirm that the Fixing Dial is properly tightened and the Shoe Base BALL is installed properly as in below left image. Incomplete tightening of the Fixing Dial or improper installation could lead to accidental removal/damage/loss of this product and/or combined system.

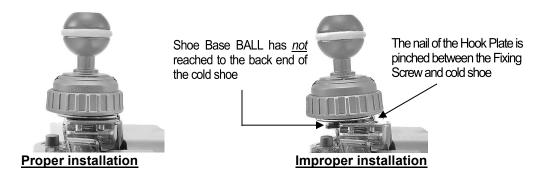

Maintenance:

- After each use, rinse with fresh water to dissolve any salt build-up and clean the product. Place in shaded and well ventilated area to completely dry. Never apply flame or direct heat or deformation/damage may result.
- <u>DO NOT</u> clean with organic solvent like alcohol, benzene or thinner and oil and fat containing /chemical material like rust inhibitor, lubricant, polish or chemical agents (especially alkaline cleaning agents). This product is made from polycarbonate etc., which will dissolve or get brittle if put in contact with such materials.

Storage method:

- Store the product in shaded, well ventilated and dry area. Avoid storing near chemicals or in the area with cold/high temperature, high humidity or large temperature and humidity fluctuations to prevent deformation, mold, rust or corrosion.
- Keep this product out of reach of children. They may swallow accessories or small parts of this product. See a doctor immediately if a child swallow accessories or small parts.

Handling Precautions:

- This product is designed to make simple set-up to attach strobe/light/compact digital camera
 /action camera etc. on a water-proof housing. So <u>DO NOT</u> attach too heavy product or too many
 products to combine to avoid excessive load on this product and combined water-proof housing
 or abrupt movement of the combined product should happen leading to personal injury, damage
 or malfunction of this product/combined products.
- Make sure to install the product properly according to this user manual. If the Fixing Dial has not been properly tightened or the Shoe Base BALL is not properly installed, this product and combined product(s) may be fell off/damaged/missing.
- INON confirms product compatibility only with listed products.
 <u>Never</u> use this product for non-compatible product to avoid combined product/housing/protector being fell off/damaged/ missing.
- When transporting combined system using this product, be sure to hold "compatible housing etc." instead holding combined product or this product itself and <u>DO NOT</u> apply excessive shock, vibration or excessive load on the combined system to avoid combined product/housing /protector being fell off/damaged/missing.

Options:

Accessory Shoe Spacer for Canon

Required to attach this product on accessory shoe of compatible Canon water-proof housings without rattle.



Shoe Base Adapter D4

Optional product to attach this product on compatible product including base stay products such as $\lceil \text{Grip Base D4} \rfloor$ or $\lceil \text{Port Arm for MRS} \rfloor$.



Shoe Base Adapter X2

Optional product to attach this product on compatible product including $\lceil X-2 \rfloor$ series housing or $\lceil Grip\ Bar\ III \rfloor$.



Shoe Base Spacer

Optional product to attach this product on compatible product including "Float Arm" /"Mega Float Arm", "Stick Arm" + 「M5 Joint」 and "Multi Ball Arm" + 「M5 Joint」.



Please note that housing manufacture has no concern with the installation of this product on the housing. <u>DO NOT</u> inquire housing manufacture about the installation. Also please note that you have to take full responsibility for the installation.

<u>The installation of this product may void warranty of housing</u> even the warranty period has not been expired. Please check user manual/warranty certificate of housing for detail of warranty condition

INON INC. cannot take any responsibility for any trouble/damage(damage to housing/housing accessories/camera) resulting from the installation.

Should you have trouble like flooding caused by the installation, INON INC. cannot take any responsibility for incidental damage(relevant expense to take a shot etc.)

Please perform the modification only if you can accept above conditions.

| INON Char Dave DAVI Consider the 1841 | |
|---------------------------------------|---|
| INON Shoe Base BALL Specification[*1] | |
| Model | Shoe Base BALL |
| Dimensions | W: 40mm (1.6in.) x H: 55mm (2.2in.) x D: 40mm(1.6in.) |
| Weight | Air: 52g (1.8oz) / Underwater: approx.28g (1.0oz) |
| Material/Finishing | Polycarbonate / aluminum alloy etc. |

^{*1} Specification is subject to change without prior notice

INON Inc.

2-18-9, Dai, Kamakura, Kanagawa 247-0061 JAPAN E-mail support@inon.co.jp Fax. +81(0)467-48-2178

URL http://www.inon.jp/