

# INON

## INON Straight Viewfinder Unit II for Nauticam


Thank you for purchasing INON product.

**Installing this product on Nauticam housing may void housing warranty.  
Please check warranty condition of your housing before installing.**

### Features

- A viewfinder to fit to compatible Nauticam housings.
- Straight type viewfinder designed for full frame DSLR providing exceptional clear view.
- High performance large prism and effectively arranged antireflection coating on optical component surfaces enables to see every corner of camera's viewfinder image clearer and brighter.
- Optically designed to suit to an EVF: electrical viewfinder of a DSLR camera, which provides wider viewing angle having minimal vignetting or degradation of image quality even at corners.
- Magnification of this viewfinder is same as camera's viewfinder not to have aberrations or indistinct to eyes.
- As its eye-point underwater is extended to 60mm/2.4inch, no vignetting of viewfinder image even through a mask.
- Viewfinder body is made from thick FRP: fiber reinforced plastic to make the body compact, lightweight yet durable.
- Optional **diopter correction lens** to shift +1.5 diopter for those who are unable to adjust with camera's viewfinder diopter adjustment range due to long sight or presbyopia.

<b>Package contents :</b>	<ul style="list-style-type: none"><li>• Straight Viewfinder Unit</li><li>• Viewfinder Unit Lock Ring</li><li>• for Nauticam</li><li>• Lock Ring Tool</li><li>• Lens Cap</li><li>• Spare O-ring</li></ul>	<ul style="list-style-type: none"><li>① x1</li><li>② x1*</li><li>③ x1</li><li>④ x1</li><li>⑤ x2</li></ul>
---------------------------	--	---

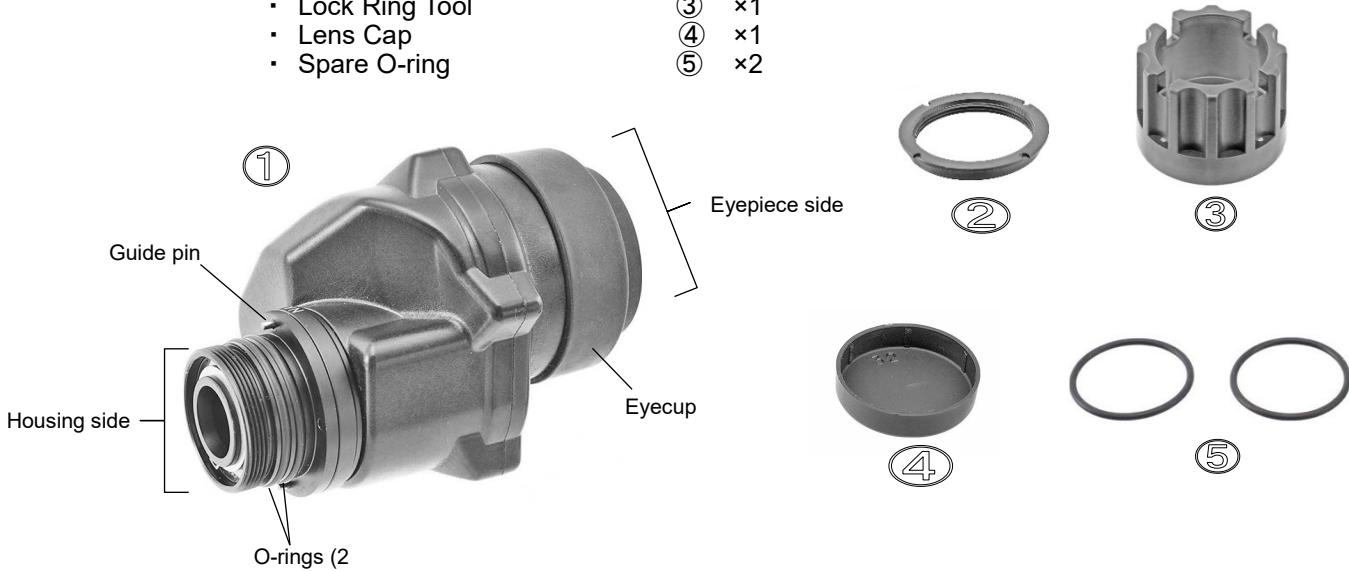

### Compatible Nauticam housings:

(As of October 2020)

DSLR	Mirrorless
All models	Sony NA-A9, NA-A7RIII, NA-A7II, NA-A7
	Nikon NA-Z7
	Canon NA-R
	Fujifilm NA-XT3, NA-GFX50S
	Panasonic NA-S1R, NA-S1H
	Olympus NA-EM1X


## Installation:



Installation guidance  
on YouTube


### Removing Nauticam Viewfinder

- Remove “VF/LCD switch lever screen” (a).\*Some housing doesn’t have the screen.
- Remove finder retaining ring with bundled tool (**Lock Ring Tool**). Put pins of the tool in concave parts of the retaining ring outer edge and turn the tool counterclockwise (c). Use a hex key or steel bar to turn the tool if the retaining ring is hard to turn (d).
- Remove the O-ring. (You can pinch the O-ring from cutout part by fingers) (e)
- Slowly push the finder from inside of the housing (f).

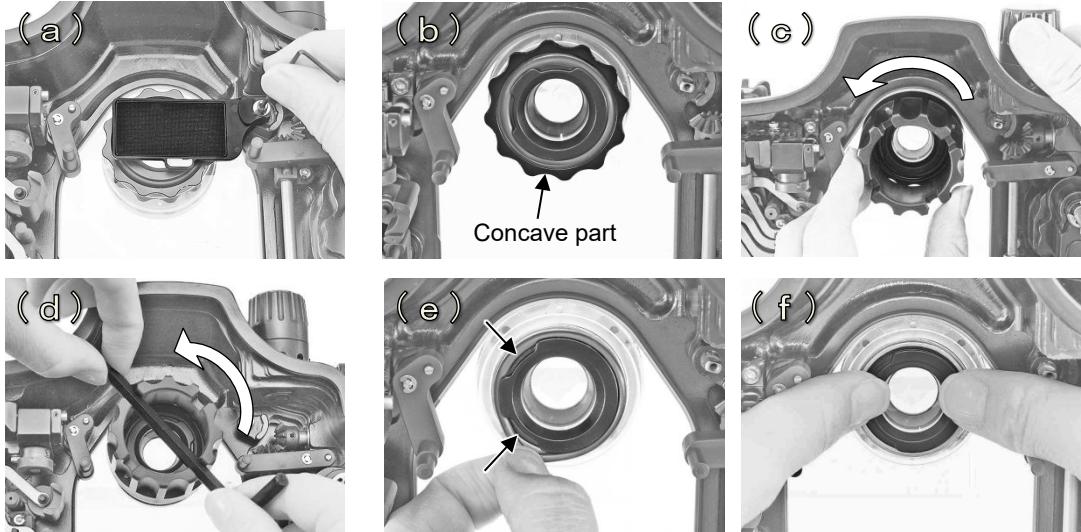


### Preparation Before Installing Viewfinder

- Make sure to check the condition of O-rings of the Viewfinder Unit and O-ring contact surface of the housing. They must be perfect condition without any damage or foreign substances (g, k).
- Apply thin film of grease (grease for housing) on the O-ring surface uniformly (k).
- When you re-install/replace the O-ring, follow below procedure.  
Lightly squeeze the O-ring from the sides so it bulges out then grasp and gently pull it off by fingers (h). Next, check condition of the O-ring/O-ring groove and make sure that they do not have any damage or any foreign substances (i). Use supplied spare O-ring if installed O-ring needs to be replaced. Using fingertips, apply thin uniform film of grease (grease for housing) on the O-ring (j). Install the O-ring in the O-ring groove without twisting. Lastly check and make sure that the O-ring is seated completely and uniformly without being twisted (k).

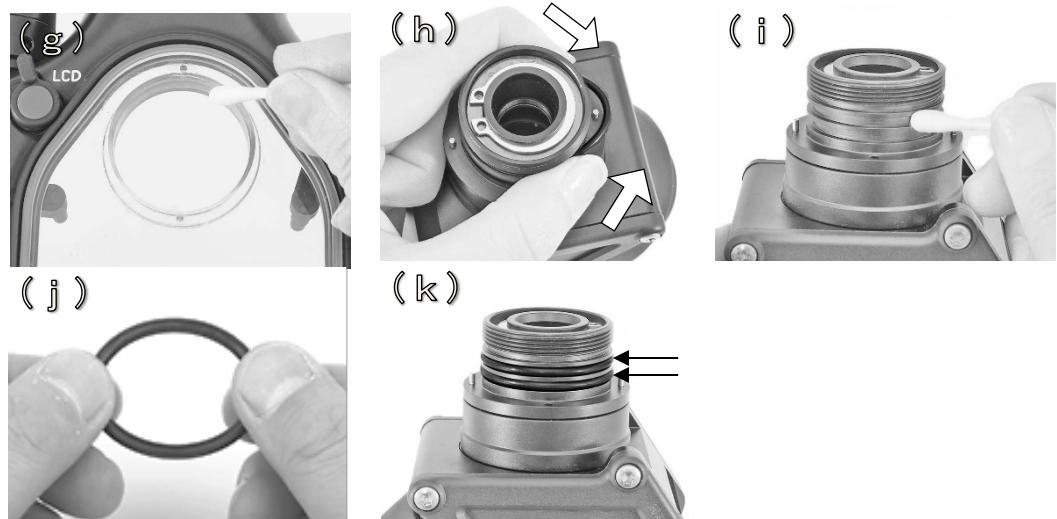

## Installing Straight Viewfinder Unit

- If your housing has pins, remove them by pliers. Holes are positioning holes for the viewfinder (l).
- Slowly put cylindrical part of the viewfinder into the finder hole of the housing so that positioning pins of the viewfinder seat in positioning holes on the housing (m). Make sure **not to damage** O-rings of the viewfinder, O-ring contact surface of the finder hole.
- Fasten the viewfinder unit with bundled “Viewfinder Unit Lock Ring for Nauticam” from inside of the housing. (grooves on the ring facing you) (n).
- Engage pins on the **Lock Ring Tool** with grooves of the **Viewfinder Unit Lock Ring for Nauticam** to tighten the ring completely (o).
- Reinstall removed **VF/LCD switch lever screen** (a).

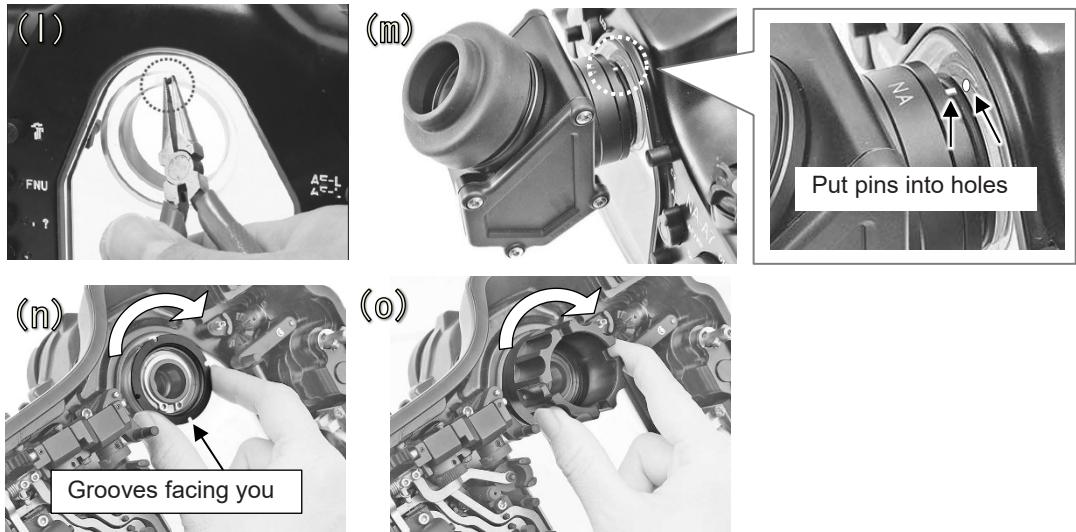

### Pre-use check:

- Close the housing without a camera and immerse assembled housing/viewfinder in a bath tub with fresh water (below 30°C/86°F) to check waterproof property. **There must be no flooding inside of the assembled housing/viewfinder.** Improper installation may cause flooding or accidental damage.
- **Make sure to re-tighten the Viewfinder Unit Lock Ring for Nauticam before every time you use your housing.**

### Handling precautions:

Together with precautions in housing user manual, please follow handling precautions below.

- **DO NOT let sunlight get into the viewfinder unit directly** to avoid possible damage on camera itself.  
When not in use, cover the eyepiece with supplied lens cap.  
\*Always make sure that the viewfinder is completely dry including lens surface before using lens cap.
- **DO NOT let water/foreign substances get inside of the viewfinder unit**  
Camera side of the Viewfinder unit is not waterproof/dustproof structure. Always clean inside of the housing and make sure not to let water/dust get inside whenever you open/close housing rear body. Avoid opening/closing housing rear body at splashed or humid area as much as possible. If you have to open housing rear body in such areas by necessity, rinse assembled housing/viewfinder well with fresh water and thoroughly swab them, then open carefully not to allow water/dust getting inside of the housing/viewfinder. Please contact purchasing dealer for possible repair if you observe any water/foreign substances inside of the viewfinder unit.
- **DO NOT disassemble**  
The Straight Viewfinder is precisely assembled. Never attempt to disassemble the Straight Viewfinder to avoid malfunction/flooding. Contact your purchasing dealer for repair/check if you observe malfunction/irregularity. Repair/disassemble/modification not by INON will void warranty and INON will not compensate any damage caused by such acts.

**After Use:  
Maintenance**

After use, first remove the eyecup and rinse together with the housing to dissolve any salt build-up. Then blow off remaining water on the eyepiece of the viewfinder unit and make sure that no water/moisture remains on the eyepiece lens surface. Place in shaded and well ventilated area to dry (it may take several days to completely dry). Put back the eyecup on the viewfinder unit after both of them are completely dried.

**Storage method :**

After maintenance, put the lens cap on and store it under recommended storage condition as same as housing.

**Option/servicing :  
parts**

· **Diopter Correction Lens [+1.5D] for 45VF-II/STVF-II**

Add-on correction lens to shift +1.5 diopter for those who are unable to adjust with camera's viewfinder diopter adjustment angle due to long sight or presbyopia. The **Diopter Correction Lens** has to be installed before diving by drop it inside of the viewfinder from housing side and tighten it by packaged tool (not removable underwater).



· **Viewfinder Unit Lock Ring for Nauticam**

② in the product image.

· **Lock Ring Tool for Finder Unit**

③ in the product image.

· **Lens Cap**

④ in the product image.

· **Replacement O-ring (for 45VF-II/STVF-II for Nauticam)**

⑤ in the product image, package of two.

INON Straight Viewfinder Unit II for Nauticam Specifications\*

Model	Straight Viewfinder Unit II for Nauticam
Length/width/height **	101.8 mm/4.0 in. 72.2 mm/2.8 in. 74.0 mm/2.9 in.
Weight (*2) [air]	305 g/10.8oz
Material/finishing	Corrosion-resisting aluminum alloy/black rigid alumite, PC etc.
Lens material/finishing	Optical glass/antireflection coating
Lens construction	5 elements in 3 groups, high refractive porro prism x 3
Magnification/eye-point(u/w)	1.0x, approx. [u/w] 60 mm/2.4 in. [air] 45 mm/1.8 in.
Depth rating	100 m/328 ft

\* Subject to change without prior notice.

\*\* Including the eyecup without the lens cap.

INON Inc.

2-18-9, Dai, Kamakura,  
Kanagawa 247-0061 JAPAN  
E-mail [support@inon.co.jp](mailto:support@inon.co.jp)  
Fax. +81(0)467-48-2178  
URL <http://www.inon.jp/>

October 2020

## ***Tips on Diopter Adjustment***

Under bright circumstance on land, human eye's pupil shrinks making diopter adjustment easy as depth of field is deep while the adjusted viewfinder may not provide perfect focus when the pupil opens in dark underwater as the depth of field gets shallow and it becomes hard to see viewfinder image especially with presbyopic eye due to deteriorated focusing function.

Though it varies among different individuals or ages, it takes about 15 minutes to open pupils by dark adaptation. So it would be recommended to conduct diopter adjustment in a dark room (darker than underwater) after staying there for 15 minutes when pupils open as like being underwater to get perfect focus of viewfinder image even underwater where pupils will open.

As long as proper diopter adjustment simulating dark underwater as explained above is performed, expensive diopter adjustment function on a viewfinder is not required anymore.